

# ORACLE EXALOGIC ELASTIC CLOUD X6-2



## KEY FEATURES

- **Hardware:**  
Intel Xeon E5-powered compute nodes, InfiniBand and Ethernet switches, integrated storage system
- **Guest Operating System:**  
Oracle Linux
- **Cloud Software:**  
Complete Infrastructure-as-a-Service (IaaS) management
- **Server Virtualization:**  
High performance Type I hypervisor
- **Storage Software:**  
Complete storage management, including clones, snapshots and replication
- **Management Tools:**  
Configuration management, diagnostics and remote health monitoring
- **Oracle Enterprise Manager Integration:**  
Integrated support for end-to-end Oracle middleware and application management

*Oracle Exalogic Elastic Cloud is a datacenter building block that integrates compute, networking and storage hardware with virtualization, operating system and management software. It provides breakthrough performance, reliability, availability, scalability and investment protection for the widest possible range of business application workloads, from middleware and custom applications to packaged applications from Oracle and hundreds of 3rd party vendors, in both conventional and cloud deployments. As an Oracle Engineered System, Oracle Exalogic delivers faster deployment, higher user productivity, lower TCO, reduced risk and one-stop support.*

## Exalogic: The Logical Choice for Running Business Applications

Today many organizations have limited ability to process business transactions at a speed their business requires. This restricts their business choices and prevents them from seizing market opportunities. Oracle Exalogic addresses these problems by providing the performance and scalability that applications need, while supporting consolidation of multiple applications on the same system to reduce data center costs. Exalogic offers value to customers across three key dimensions:

### Seize Market Opportunities

- For back office applications, close business up to 10X faster with applications tuned for blazing performance
- For front-office applications, improve the customer buying experience by dramatically reducing application response time and improving usability
- Respond rapidly to market needs by provisioning applications up to 5X faster than on traditional platforms

### Lower Business Risk and Protect Your IT Investment

- Protect your sensitive data with true application isolation at the hardware and software levels
- Reduce application deployment and maintenance complexity while maximizing application availability and user productivity
- Enjoy peace of mind with the industry-leading Platinum Services for Engineered Systems, offering a 5-minute support SLA

### Reduce Cost and Complexity of Application Deployments

- Deploy and/or consolidate mission-critical business applications and middleware with push-button simplicity onto a virtualized environment
- Simplify application delivery with easy-to-use, built-in load balancing
- Align application resources to business priorities with full built-in management, from applications to disk

## Exalogic Elastic Cloud Software

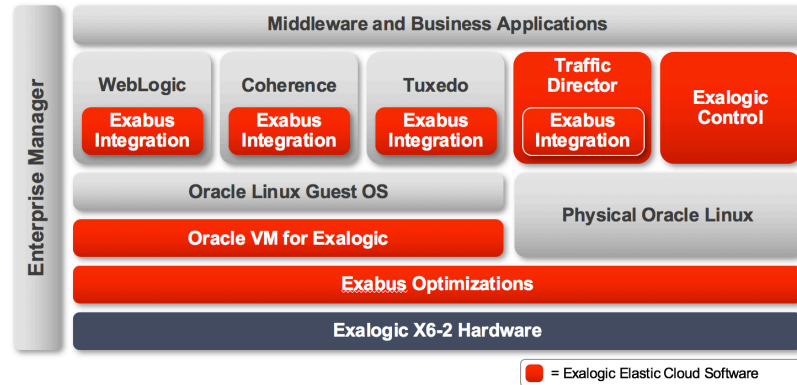


Figure 1: Key Components of Oracle Exalogic Elastic Cloud

Oracle Exalogic Elastic Cloud software includes:

- **Oracle Exabus:** A communication fabric connecting compute, storage and networking components of Exalogic. It is comprised of firmware, device drivers and application APIs built upon Oracle InfiniBand technology. Through special integration with Oracle Cloud Application Foundation middleware, Exabus provides ultra-low latency Remote Direct Memory Access.
- **Oracle VM Server for Exalogic:** Optimized Type I hypervisor that Exalogic uses to host virtual servers running an optimized version of Oracle Linux, with the highest performance and lowest overhead of any virtualization technology.
- **Oracle Traffic Director:** An integrated application delivery controller capable of everything from standard load-balancing to complex traffic shaping, traffic metering and security enforcement. It features native Oracle Exabus integration for maximum performance, manageability and security.
- **Exalogic Control:** Allows administrators to manage and monitor system hardware, perform firmware and software upgrades, create user accounts, manage virtual resources and monitor resource utilization. It runs directly on Exalogic and provides comprehensive cloud management capabilities.
- **Guest Operating System:** Oracle Exalogic includes extensions to Oracle Linux for enhanced application performance and manageability while maintaining compatibility with existing applications. All software certified for the appropriate Linux version is fully supported for Exalogic.
- **Storage Management Software:** Oracle Exalogic includes a complete storage management system that supports snapshots, volume cloning and remote replication for backup and disaster recovery.

## Exalogic Elastic Cloud Hardware

Oracle Exalogic Elastic Cloud X6-2 hardware includes:

- **Converged Fabric:** The foundation of Oracle Exalogic is its ultra-high-performance, converged I/O backplane. Exalogic contains multiple QDR InfiniBand switches that connect the components inside the system and serve as gateways to the data center's Ethernet network. The Exalogic fabric offers extremely low latency, 40 Gb/s throughput, full redundancy, integrated end-point security and massive scalability up to thousands of virtual servers.

- **Compute Nodes:** Exalogic compute nodes are self-contained servers containing Intel Xeon E5 CPUs, high-speed DIMM memory, redundant InfiniBand Host Channel Adapters and redundant solid state disks. Each node runs a single instance of Oracle Linux or Oracle VM Server hypervisor. Nodes may be added or removed without any downtime.
- **Integrated Storage:** Exalogic features a fully integrated, enterprise-grade Oracle ZFS Storage Appliance, used as the primary shared storage for the system. It is designed to be fully redundant for maximum fault tolerance and serviceability and has high performance DIMM and flash memory for optimal read/write performance under the most demanding file storage workloads.

## Exalogic X6-2 Hardware Specifications

Exalogic X6 2	Eighth Rack	Quarter Rack	Half Rack	Full Rack
<b>Aggregate Specifications</b>				
• Processor Cores	176	352	704	1320
• Memory	1 TB	2 TB	4 TB	7.5 TB
• Integrated Disk Storage (Raw)	160 TB	160 TB	160 TB	160 TB
<b>Power</b>				
• Maximum	4.577 kW 4.669 kVA	7.273 kW 7.418 kVA	12.985 kW 13.245 kVA	23.061 kW 23.522 kVA
• Typical	3.204 kW 3.268 kVA	5.091 kW 5.193 kVA	9.090 kW 9.271 kVA	16.143 kW 16.466 kVA
<b>Cooling</b>				
• Maximum	15626 BTU/hour 16485 kJ/hour	24830 BTU/hour 26196 kJ/hour	44331 BTU/hour 46769 kJ/hour	78730 BTU/hour 83060 kJ/hour
• Typical	10938 BTU/hour 11540 kJ/hour	17381 BTU/hour 18337 kJ/hour	31032 BTU/hour 32738 kJ/hour	55111 BTU/hour 58142 kJ/hour
<b>Airflow (front to back)</b>				
• Maximum	723 CFM	1150 CFM	2052 CFM	3645 CFM
• Typical	506 CFM	805 CFM	1437 CFM	2551 CFM
<b>Weight</b>				
• Installed	550 kg 1213 lbs	630 kg 1389 lbs	810 kg 1786 lbs	1007 kg 2220 lbs
• Shipping	600 kg 1322 lbs	680 kg 1499 lbs	860 kg 1896 lbs	1150 kg 2535 lbs
<b>Power Distribution Units (PDU)</b>				
• HV 3-Phase 24kVA	Y	Y	Y	Y
• LV 3-Phase 24kVA	Y	Y	Y	Y
• HV 1-Phase 22kVA	Y	Y	Y	N
• LV 1-Phase 22kVA	Y	Y	Y	N
• HV 3-Phase 15kVA	Y	Y	Y	N
• LV 3-Phase 15kVA	Y	Y	Y	N
• LV 1-Phase 15kVA	Y	Y	Y	N
<b>Management Switch</b>				
• (48) GbE ports (BASE-T)	1	1	1	1
<b>Storage Subsystem</b>				
• (4) QDR InfiniBand ports (one active and one passive per storage head)	1	1	1	1
• 6.4 TB solid state disk read cache				
• 800 GB solid state disk write cache				
• 160 TB Serial Attached SCSI (SAS) disks				
• (2) 10GbE remote replication ports (BASE-T)				
• (1) GbE management port (BASE-T)				
<b>InfiniBand Spine Switch(es)<sup>4</sup></b>				
• (36) QDR InfiniBand ports	0	0	0	0
• (1) GbE management ports (BASE-T)				

Exalogic X6 2	Eighth Rack	Quarter Rack	Half Rack	Full Rack
<b>InfiniBand Gateway Switch(es)</b>	2	2	2	4
<b>10 GbE Network Uplinks (Max)</b>	16	16	16	32
<ul style="list-style-type: none"> <li>• (32) QDR InfiniBand ports (BASE-T)</li> <li>• (8) 10GbE ports (LC – SFP+)</li> <li>• (1) GbE management port (BASE-T)</li> </ul>				
<b>Compute Node(s)</b>	4	8	16	30
<ul style="list-style-type: none"> <li>• (2) Intel E5-2699V4 2.2 GHz Xeon (22-core Broadwell) processors</li> <li>• (8) 32GB DDR4 2400 MHz RAM</li> <li>• (2) 400GB SSDs (RAID1)</li> <li>• (1) Dual-port QDR InfiniBand HCA (PCIe)</li> <li>• (1) GbE management port (BASE-T)</li> <li>• Redundant power supplies</li> </ul>				
<b>Operating Temperature</b>				
<ul style="list-style-type: none"> <li>• 5 degrees Celsius to 32 degrees Celsius (59 degrees Fahrenheit to 89.6 degrees Fahrenheit), 10 percent to 90 percent relative humidity, non-condensing</li> <li>• Altitude operating temperature: Up to 3048 m, maximum ambient temperature is de-rated by 1 degree Celsius for every 300 m above 900 m</li> </ul>				
<b>Physical Dimensions (Unpackaged)</b>				
<ul style="list-style-type: none"> <li>• Height: 42U, 78.66" - 1998 mm</li> <li>• Width: 23.62" – 600 mm</li> <li>• Depth: 47.24" – 1200 mm</li> </ul>				
<b>Pre-installed Software</b>				
<ul style="list-style-type: none"> <li>• Oracle Exalogic (Compute Node) Base Image</li> <li>• Storage System Software</li> <li>• Oracle Exalogic Configuration Utilities</li> </ul>				
<b>Regulations<sup>1,2,3</sup></b>				
<ul style="list-style-type: none"> <li>• Product Safety: UL/CSA 60950-1, EN 60950-1, IEC 60950-1 CB Scheme with all country differences</li> <li>• EMC: Emissions: FCC CFR 47 Part 15, ICES-003, EN55022, EN61000-3-11, EN61000-3-12, Immunity: EN55024</li> <li>• Emissions and Immunity: EN300 386</li> </ul>				
<b>Certifications<sup>2</sup></b>				
North America (NRTL), European Union (EU), International CB Scheme, BIS HSE Exemption (India), RCM (Australia), CCC (PRC), VCCI (Japan)				
<b>European Union Directives*</b>				
<ul style="list-style-type: none"> <li>• 2006/95/EC Low Voltage Directive</li> <li>• 2004/108/EC EMC Directive</li> <li>• 2011/65/EU RoHS Directive</li> <li>• 2012/19/EU WEEE Directive</li> </ul>				
1) All standards and certifications referenced are to the latest official version. For additional detail, please contact your sales representative.				
2) Other country regulations/certifications may apply.				
3) In some cases, as applicable, regulatory and certification compliance were obtained at the component level only.				
4) Spine switch is not included, but should be ordered as necessary for multi-rack configurations				

## Contact Us

For more information about Exalogic, visit [oracle.com](http://oracle.com) or call +1.800.ORACLE1 to speak to an Oracle representative.



Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

This document is provided for information purposes only, and the contents hereof are subject to change without notice. This document is not warranted to be error-free, nor subject to any other warranties or conditions, whether expressed orally or implied in law, including implied warranties and conditions of merchantability or fitness for a particular purpose. We specifically disclaim any liability with respect to this document, and no contractual obligations are formed either directly or indirectly by this document. This document may not be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without our prior written permission.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group. 0113

**Hardware and Software, Engineered to Work Together**